



Ornit Blind Rivets has manufactured blind rivets since 1975. Ornit provides unique custom-designed fastening solutions for the automotive, constructive, electronic and industrial markets. Ornit's product lines are designed for a wide range of applications in all markets.

The company's portfolio includes structural rivets, roofing rivets, multi-grip rivets and other fastening devices made from various alloy combinations of aluminium, steel and stainless steel.

### Quality

Ornit's high standards and top quality products are ensured by quality assurance procedures at all stages of production.

### International Standards

Ornit manufactures in compliance with the IFI and DIN standards according to the product. Ornit's dedication to performance excellence has led us to be awarded with the ISO/TS 16949 and ISO 9001:2000 certifications.

### Research and Development

Ornit's R&D department is equipped with the latest technology and a highly experienced and knowledgeable team ready to face any challenge. Their expertise provides Ornit's customers with ideal solutions for any fastening application.

### Customers

Ornit's products are exported around the world, i.e. Europe, Australia, South Africa, Far East and Latin America.

Ornit established a subsidiary company in the USA, Ornit Inc. to support the distribution of our products in North America.

Ornit is the leading distributor of fasteners in Israel.

### Ornit's Vision

Ornit, a global company, remains on the front line in the fastening industry by researching, developing and manufacturing innovative fastening solutions.

### Ornit's Objectives

- To continue to learn, understand and foresee the customers' changing desires and ambitions.
- To provide creative, flexible and competitive fastening solutions for customers worldwide.
- To maintain close business relationships with our customers.
- To remain uncompromising on product quality by implementing quality assurance regulations and maintaining international standards.
- To maintain high service standards by meeting our customers needs.
- To broaden Ornit's worldwide activities through product development.
- To invest in Ornit's human resources.



# Super Orlock Steel

## Protruding Head.....

### HIGH STRENGTH, WIDE GRIP RANGE

**Body Material:** Low Carbon Steel

**Body Finish:** Zinc Plated Cr VI free


**Mandrel Material:** Carbon Steel

**Mandrel Finish:** Zinc Plated Cr VI free









Before Installation





After Installation



Dimensions - Nominal

					ART.No			 MIN MAX				
	mm / inch	mm / inch	mm / inch	mm / inch		mm	inch	mm	inch	mm	inch	
<b>6.5</b> <b>1/4"</b>	6.7-6.9 .263 -.271	3.0 .118	13.0 .512	4.17 .164	<b>LS65105P</b>	10.5	.413	2.0	.079	4.5	.177	2,000
					<b>LS65125P</b>	12.5	.492	3.0	.118	6.5	.256	2,000
					<b>LS65145P</b>	14.5	.571	5.0	.197	8.5	.335	2,000
					<b>LS65165P</b>	16.5	.650	7.0	.276	10.5	.413	2,000
					<b>LS65185P</b>	18.5	.728	9.0	.354	12.5	.492	2,000
					<b>LS65205P</b>	20.5	.807	11.0	.433	14.5	.571	2,000
					<b>LS65225P</b>	22.5	.886	13.0	.512	16.5	.650	1,000

Forces - Nominal

ART.No		
	kg / Lbs.	kg / Lbs.
<b>LS65105P</b>	1100 / 2420	810 / 1782
<b>LS65125P</b>	1250 / 2750	810 / 1782
<b>LS65145P</b>	1400 / 3080	810 / 1782
<b>LS65165P</b>	1450 / 3190	810 / 1782
<b>LS65185P - LS65225P</b>	1570 / 3454	810 / 1782

# Super Orlock Steel

Large/X Head.....

HIGH STRENGTH, WIDE GRIP RANGE

**Body Material:** Low Carbon Steel


**Body Finish:** Zinc Plated Cr VI free

**Mandrel Material:** Carbon Steel









**Mandrel Finish:** Zinc Plated Cr VI free

Before Installation


After Installation



## Dimensions - Nominal

					ART.No			 MIN MAX				
	mm / inch	mm / inch	mm / inch	mm / inch		mm	inch	mm	inch	mm	inch	
<b>6.5</b> <b>1/4"</b>	6.7-6.9 .263-.271	3.0 .118	16.3 .642	4.17 .164	<b>LS65145L</b>	14.5	.571	5.0	.197	8.5	.335	2,000
					<b>LS65165L</b>	16.5	.650	7.0	.276	10.5	.413	2,000
					<b>LS65185L</b>	18.5	.728	9.0	.354	12.5	.492	1,500
					<b>LS65205L</b>	20.5	.807	11.0	.433	14.5	.571	1,500
					<b>LS65225L</b>	22.5	.886	13.0	.512	16.5	.650	2,000
<b>6.5</b> <b>1/4"</b>	6.7-6.9 .263-.271	3.0 .118	19.0 .748	4.17 .164	<b>LS65145X</b>	14.5	.571	5.0	.197	8.5	.335	2,000
					<b>LS65165X</b>	16.5	.650	7.0	.276	10.5	.413	1,000
					<b>LS65185X</b>	18.5	.728	9.0	.354	12.5	.492	1,000
					<b>LS65205X</b>	20.5	.807	11.0	.433	14.5	.571	1,000
					<b>LS65225X</b>	22.5	.886	13.0	.512	16.5	.650	1,000

## Forces - Nominal

ART.No		
	kg / Lbs.	kg / Lbs.
<b>LS65145L</b>	1400 / 3080	810 / 1782
<b>LS65165L</b>	1450 / 3190	810 / 1782
<b>LS65185L - LS65225L</b>	1570 / 3454	810 / 1782
<b>LS65145X</b>	1400 / 3080	810 / 1782
<b>LS65165X</b>	1450 / 3190	810 / 1782
<b>LS65185X - LS65225X</b>	1570 / 3454	810 / 1782

# Super Orlock Steel - Stainless Protruding Head..

HIGH STRENGTH, WIDE GRIP RANGE

**Body Material:** Low Carbon Steel

**Body Finish:** Zinc Plated Cr VI free


**Mandrel Material:** Austenitic Stainless Steel - Cu304

**Mandrel Finish:** Natural









Before Installation





After Installation




Dimensions - Nominal

					ART.No			 MIN MAX				
	mm / inch	mm / inch	mm / inch	mm / inch		mm	inch	mm	inch	mm	inch	
<b>6.5</b> <b>1/4"</b>	6.7-6.9 .263-.271	3.0 .118	13.0 .512	4.17 .164	<b>LSN65105P</b>	10.5	.413	2.0	.079	4.5	.177	2,000
					<b>LSN65125P</b>	12.5	.492	3.0	.118	6.5	.256	2,000
					<b>LSN65145P</b>	14.5	.571	5.0	.197	8.5	.335	2,000
					<b>LSN65165P</b>	16.5	.650	7.0	.276	10.5	.413	2,000
					<b>LSN65185P</b>	18.5	.728	9.0	.354	12.5	.492	2,000
					<b>LSN65205P</b>	20.5	.807	11.0	.433	14.5	.571	2,000
					<b>LSN65225P</b>	22.5	.886	13.0	.512	16.5	.650	1,000

Forces - Nominal

ART.No		
	kg / Lbs.	kg / Lbs.
<b>LSN65105P</b>	1100 / 2420	810 / 1782
<b>LSN65125P</b>	1250 / 2750	810 / 1782
<b>LSN65145P</b>	1400 / 3080	810 / 1782
<b>LSN65165P</b>	1450 / 3190	810 / 1782
<b>LSN65185P - LSN65225P</b>	1570 / 3454	810 / 1782

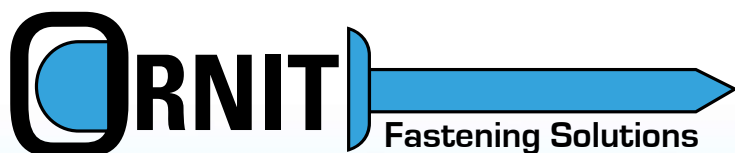

## ORNIT BLIND RIVETS



Construction



Domestic Appliances



Electronics



Automotive



Commercial Vehicles



Railways



Solar

**ORNIT BLIND RIVETS:** Kibbutz OR-HANER, M.P Hof Ashkelon 79190, ISRAEL

Tel: +972-8661-0222 Fax: +972-8661-1380 [info@ornit.com](mailto:info@ornit.com)

ORNIT INC.: 23230 Chagrin Blvd. suite 950 Beachwood, OH 44122

Tel: 216-360-8117 Toll Free: 1-877-627-0423 [ornitinc@ornit.com](mailto:ornitinc@ornit.com)

**WWW.ORNIT.COM**

contacts: