



W2

Supra CT Constant tension Heavy-Duty Clamp

The Supra CT clamp incorporates a series of AISI-304 Stainless steel spring washers to the outstanding Supra W2 clamp. This specialized version of the Supra W2 is used in applications subject to vibration and/or great variations in temperature and which cause the components of a hose assembly to expand and contract. Thanks to the spring washer system, the Supra CT maintains constant pressure around the hose and prevents leakage. The beveled edges protect the hose from damage.

The Supra CT clamp complies fully with the RoHS directive EU 2003/95/EC dated 1st July 2006. This clamp is generally fitted in high-powered diesel engines in construction machinery, trucks, buses, marine engines, military vehicles and diesel-powered generators as well as in various other industrial applications where expansion and contraction cause assemblies using standard clamps to leak.


* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.

Patented Worldwide.

Supra CT Heavy-Duty Clamp W2

Application Ø	Part n° W2	r	e	a	b	Max. Values* Torque (Nm)	Max. Values* Pressure (Bars)	Box Quantity (MOQ)	Packing
mm	inches								
25-27	1-1/16	03020142	M6	10	18 ⁺⁰²	19,8	4,5	45	50
27-29	1-1/16-15/32	03020150	M6	10	18 ⁺⁰²	19,8	4,5	45	50
29-31	1-5/32-1-7/32	03020169	M7	11	20 ⁺⁰³	220	8,0	42	50
31-34	17/32-1-11/32	03020177	M7	11	20 ⁺⁰³	22,0	8,0	42	50
34-37	1-11/32-1-29/64	03020185	M7	11	20 ⁺⁰³	220	8,0	40	50
37-40	1-29/64-1-9/16	03020193	M7	11	20 ⁺⁰³	22,0	8,0	40	50
40-43	1-9/16-1-11/16	03020206	M7	11	20 ⁺⁰³	22,0	8,0	38	50
43-47	1-11/16-1-27/32	03020214	M7	11	20 ⁺⁰³	22,0	10,0	38	50
47-51	1-27/32-2-1/64	03020222	M7	11	20 ⁺⁰³	22,0	10,0	36	50
51-55	2-1/64-2-11/64	03020230	M7	11	20 ⁺⁰³	22,0	10,0	36	25
55-59	2-11/64-2-21/64	03020249	M7	11	20 ⁺⁰³	22,0	10,0	34	25
59-63	2-21/64-2-31/64	03020257	M7	11	20 ⁺⁰³	22,0	10,0	34	25
63-68	2-31/64-2-11/16	03020265	M7	11	20 ⁺⁰³	22,0	10,0	34	25
68-73	2-11/16-3-7/8	03020273	M8	13	25 ⁺⁰⁴	27,5	25,0	28	25
73-79	3-7/8-3-7/64	03020281	M8	13	25 ⁺⁰⁴	27,5	25,0	28	25
79-85	3-7/64-3-11/32	03020290	M8	13	25 ⁺⁰⁴	27,5	25,0	28	25
85-91	3-11/32-3-37/64	03020302	M8	13	25 ⁺⁰⁴	27,5	25,0	20	25
91-97	3-37/64-3-13/16	03020310	M8	13	25 ⁺⁰⁴	27,5	25,0	20	25
97-104	3-13/16-4-3/32	03020329	M8	13	25 ⁺⁰⁴	27,5	25,0	20	25
104-112	4-3/32-4-3/8	03020337	M8	13	25 ⁺⁰⁴	27,5	25,0	12	25
112-121	4-3/8-4-49/64	03020345	M8	13	25 ⁺⁰⁴	27,5	25,0	12	25
121-130	4-49/64-5-1/8	03020353	M8	13	25 ⁺⁰⁴	27,5	25,0	12	25
130-140	5-1/8-5-33/64	03020361	M10	17	28 ⁺⁰⁴	31,0	50,0	9	10
140-150	5-33/64-5-29/32	03020370	M10	17	28 ⁺⁰⁴	31,0	50,0	9	10
150-162	5-29/32-6-3/8	03020388	M10	17	28 ⁺⁰⁴	31,0	50,0	9	10
162-174	6-3/8-6-7/8	03020396	M10	17	28 ⁺⁰⁴	31,0	50,0	6	10
174-187	6-7/8-7-23/64	03020409	M10	17	28 ⁺⁰⁴	31,0	50,0	6	10
187-200	7-23/64-7-7/8	03020417	M10	17	28 ⁺⁰⁴	31,0	50,0	6	10
200-213	7-7/8-8-25/64	03020425	M10	17	28 ⁺⁰⁴	31,0	50,0	3	10
213-226	8-25/64-8-57/64	03020433	M10	17	28 ⁺⁰⁴	31,0	50,0	3	10

W2 Band and Bridge: X6Cr17 Stainless steel (DIN 1.4016) (**Screw:** 8.8 grade steel Silver-white Cr3 Zinc-Plated **Washers and Trunions:** Stainless steel (AISI-304))

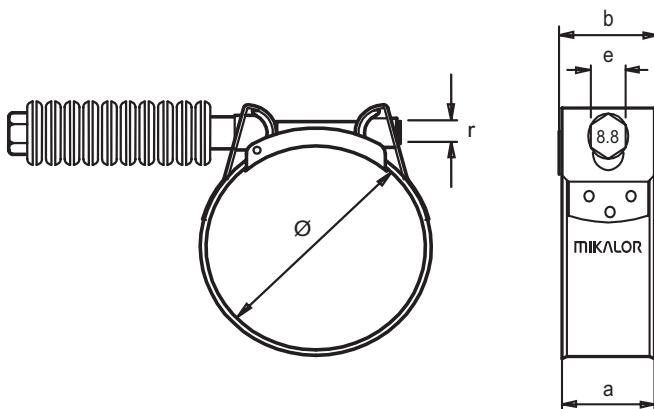



W4

Supra CT Constant tension Heavy-Duty Clamp

The Supra CT clamp incorporates a series of AISI-304 Stainless steel spring washers to the outstanding Supra W4 clamp. This specialized version of the Supra W4 is used in applications subject to vibration and/or great variations in temperature and which cause the components of a hose assembly to expand and contract. Thanks to the spring washer system, the Supra CT maintains constant pressure around the hose and prevents leakage. The beveled edges protect the hose from damage.

The Supra CT clamp complies fully with the RoHs directive EU 2003/2/95/EC dated 1st July 2006. This clamp is generally fitted in high-powered diesel engines in construction machinery, trucks, buses, marine engines, military vehicles and diesel-powered generators as well as in various other industrial applications where expansion and contraction cause assemblies using standard clamps to leak.

* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.
Patented Worldwide.

Supra CT Heavy-Duty Clamp W4

Application Ø	Part n° W4	r	e	a	b	Max. Values* Torque (Nm)	Max. Values* Pressure (Bars)	Box Quantity	Packing (MOQ)
mm	inches								
25-27	1-1/16	43013059	M6	10	18 ⁺⁰²	19,8	4,5	45	50
27-29	1-1/16-15/32	43013067	M6	10	18 ⁺⁰²	19,8	4,5	45	50
29-31	1-5/32-1-7/32	43013075	M7	11	20 ⁺⁰³	220	8,0	42	50
31-34	17/32-1-11/32	43013083	M7	11	20 ⁺⁰³	22,0	8,0	42	50
34-37	1-11/32-1-29/64	43013091	M7	11	20 ⁺⁰³	220	8,0	40	50
37-40	1-29/64-1-9/16	43013104	M7	11	20 ⁺⁰³	22,0	8,0	40	50
40-43	1-9/16-1-11/16	43013112	M7	11	20 ⁺⁰³	22,0	8,0	38	50
43-47	1-11/16-1-27/32	43013120	M7	11	20 ⁺⁰³	22,0	10,0	38	50
47-51	1-27/32-2-1/64	43013139	M7	11	20 ⁺⁰³	22,0	10,0	36	50
51-55	2-1/64-2-11/64	43013147	M7	11	20 ⁺⁰³	22,0	10,0	36	25
55-59	2-11/64-2-21/64	43013155	M7	11	20 ⁺⁰³	22,0	10,0	34	25
59-63	2-21/64-2-31/64	43013163	M7	11	20 ⁺⁰³	22,0	10,0	34	25
63-68	2-31/64-2-11/16	43013171	M7	11	20 ⁺⁰³	22,0	10,0	34	25
68-73	2-11/16-3-7/8	43013180	M8	13	25 ⁺⁰⁴	27,5	25,0	28	25
73-79	3-7/8-3-7/64	43013198	M8	13	25 ⁺⁰⁴	27,5	25,0	28	25
79-85	3-7/64-3-11/32	43013200	M8	13	25 ⁺⁰⁴	27,5	25,0	28	25
85-91	3-11/32-3-37/64	43013219	M8	13	25 ⁺⁰⁴	27,5	25,0	20	25
91-97	3-37/64-3-13/16	43013227	M8	13	25 ⁺⁰⁴	27,5	25,0	20	25
97-104	3-13/16-4-3/32	43013235	M8	13	25 ⁺⁰⁴	27,5	25,0	20	25
104-112	4-3/32-4-3/8	43013243	M8	13	25 ⁺⁰⁴	27,5	25,0	12	25
112-121	4-3/8-4-49/64	43013251	M8	13	25 ⁺⁰⁴	27,5	25,0	12	25
121-130	4-49/64-5-1/8	43013260	M8	13	25 ⁺⁰⁴	27,5	25,0	12	25
130-140	5-1/8-5-33/64	43013278	M10	17	28 ⁺⁰⁴	31,0	50,0	9	10
140-150	5-33/64-5-29/32	43013286	M10	17	28 ⁺⁰⁴	31,0	50,0	9	10
150-162	5-29/32-6-3/8	43013294	M10	17	28 ⁺⁰⁴	31,0	50,0	9	10
162-174	6-3/8-6-7/8	43013307	M10	17	28 ⁺⁰⁴	31,0	50,0	6	10
174-187	6-7/8-7-23/64	43013315	M10	17	28 ⁺⁰⁴	31,0	50,0	6	10
187-200	7-23/64-7-7/8	43013323	M10	17	28 ⁺⁰⁴	31,0	50,0	6	10
200-213	7-7/8-8-25/64	43013331	M10	17	28 ⁺⁰⁴	31,0	50,0	3	10
213-226	8-25/64-8-57/64	43013340	M10	17	28 ⁺⁰⁴	31,0	50,0	3	10

W4 Band and Bridge: X5CrNI 1810 Stainless steel (DIN 1.4301) (AISI-304) **Screw:** Stainless steel (AISI-304) **Washers and Trunions:** Stainless steel (AISI-304)

